

Aquablend eSQX Touch-Free On-Demand Sensor Point-of-Use Thermostatic Wall Mixer - Front of Wall Component – 200mm Spout

Aquablend eSQX is Australia's first and most technically advanced touch-free thermostatic mixer solution.

Designed to deliver touch-free pre-mixed warm water for enhanced infection control and cross-contamination prevention. The solution includes an infra-red sensor located above the outlet, designed for clinical hand to elbow washing for surgical scrub, and Type A and Type B wash stations.



KEY FEATURES

- On Demand Sensor - place hand in front of sensor to turn on, valve stays open without hand remaining in the sensor range. Place hand in front of sensor again to turn off
- Low voltage 12V mains power or 6V battery operated
- 200mm spout
- Flush cycle stagnation management to reduce risk of bacterial growth, usage monitoring and other function settings are adjustable via Oras App and Bluetooth connectivity
- Effective reduction of Legionella risk
- AHFG Type A and B healthcare basin compatibility
- Compatible with Smartflow Monitoring System for TMV monitoring and reporting
- Smart, durable easy-clean chrome surfaces
- Smooth bore tubular spout designed to minimise bacteria growth
- IP67 rated connections
- Faceplate can be removed to access integral isolation/check valves, strainers and inspection ports
- Requires In-Wall Component ATM621 or ATM620

PRODUCT CODES

ATWMC1L5	6Lpm
ATWMC1L6	4Lpm



Products are to be installed in accordance with the Plumbing Code of Australia and AS/NZS3500. Reference should also be made to the Australasian Health Facility Guidelines (AHFG), ABCB and Local Government regulations when considering the choice of, and the installation of these products.


Due to ongoing Research and Development, specifications may change without notice. Component specifications may change on some export models.

Refer to warranty statement for warranty details - www.enware.com.au/warranty.


Aquablend eSQX Touch-Free On-Demand Sensor Point-of-Use Thermostatic Wall Mixer - Front of Wall Component – 200mm Spout

TECHNICAL DATA

Sensor Range	20-100mm (Factory default setting - adjustable)
Water Run Time	15 secs (+/-1) after activation (Factory default setting - adjustable)
Sensor Power Supply	12 VDC or 6V Battery

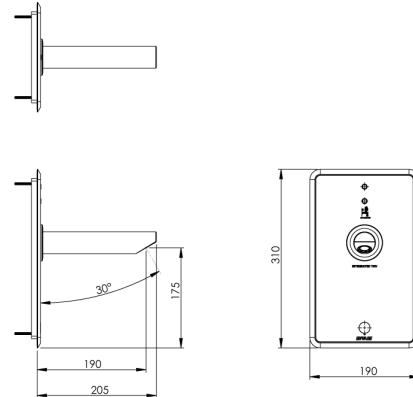

Water Flow Projection

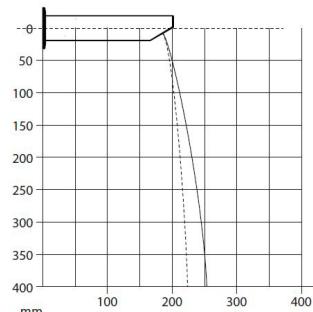

Water Pressure: 350kPa
— 6lpm Laminar
- - - 4.5lpm Laminar

REQUIRED OPTIONS

ATM621	Aquablend eSQX Touch-Free Point-of-Use Thermostatic Wall Mixer In-Wall Component - Mains
ATM620	Aquablend eSQX Touch-Free Point-of-Use Thermostatic Wall Mixer In-Wall Component - Battery