


Secure Ligature Resistant Recess Basin/Bath Set with DET660B Outlet - 1/4 Turn Ceramic Disc

Enware's water efficient easy-to-use secure tapware products have been designed to provide a high level of security and vandal resistant features.

They also provide smooth surfaces to remove ligature points and lessen the possibility of user harm.

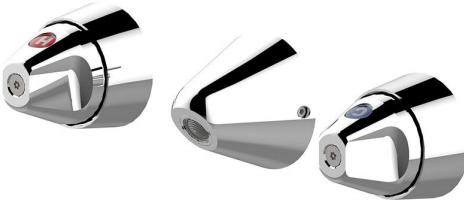

KEY FEATURES

- Ideal for all Secure bathroom environments where user comfort and safety is essential.
- Dual activation and temperature control for more normalized access to water
- Secure conical handle provides comfortable grip point
- Utilises an easy to turn ceramic disc quarter turn valve
- Anti-ligature design and anti-vandal aerator outlet
- Removal of sharp edges to reduce potential for user harm
- Identification buttons available in Cold, Warm or Hot to suit application. (3 colour indicator buttons included)
- Anti-rotation pin incorporated to inhibit tampering
- High quality Lead Free brass construction
- Chrome plated finish
- WELS: 3 Star Rating (8 L/min)
- Watermark: AS/NZS 3718 WMKA 1583

PRODUCT CODE

DET314

Secure Ligature Resistant Recess Basin/Bath Set with DET660B Outlet - 1/4 Turn Ceramic Disc



Products are to be installed in accordance with the Plumbing Code of Australia and AS/NZS3500. Reference should also be made to the Australasian Health Facility Guidelines (AHFG), ABCB and Local Government regulations when considering the choice of, and the installation of these products.

This product is compliant with the Lead Free requirements of NCC Volume Three.




Due to ongoing Research and Development, specifications may change without notice. Component specifications may change on some export models.

Refer to warranty statement for warranty details - www.enware.com.au/warranty.

Secure Ligature Resistant Recess Basin/Bath Set with DET660B Outlet - 1/4 Turn Ceramic Disc

TECHNICAL DATA

Recommended Pressure	50kPa – 500kPa
Maximum Static Pressure	800kPa
Maximum Recommended Temperature	70°C
Maximum Ceramic Disc Working Temperature	85°C
Flow Rate	8L/min 5L/min flow regulator supplied loose in carton
Valve Type	1/4 Turn Ceramic Disc
Finish	Chrome

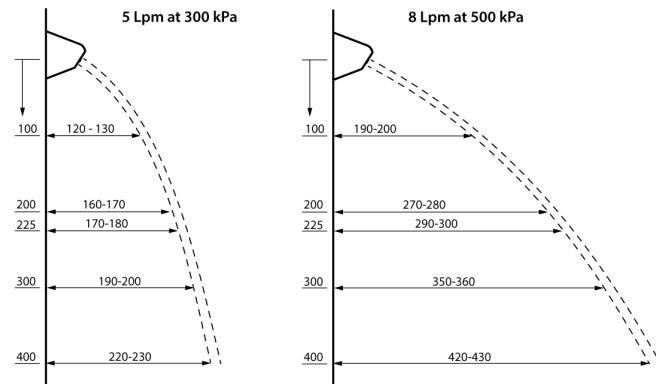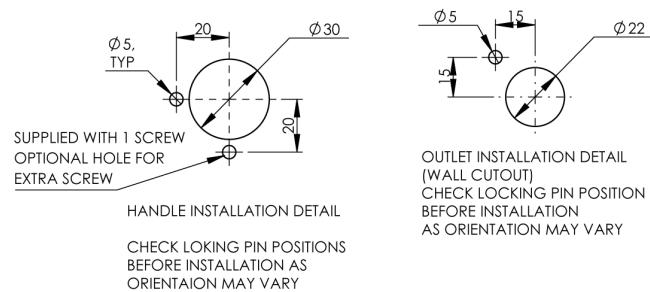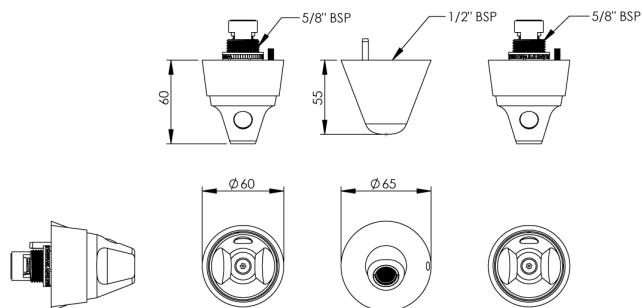

OPTIONAL ACCESSORIES

DET005	Trouble Dome - 5mm
DET015	Trouble Dome - 10mm