

# Secure Ligature Resistant: Recess Adaptor - 1/4 Turn Ceramic Disc - 15mm Extended

Enware's water efficient easy-to-use secure tapware products have been designed to provide a high level of security and vandal resistant features.

They also provide smooth surfaces to remove ligature points and lessen the possibility of user harm .

## KEY FEATURES

- Ideal for all Secure bathroom environments where user comfort and safety is essential
- Secure conical handle provides comfortable grip point
- Utilises an easy to turn ceramic disc quarter turn valve
- Ligature resistant design
- Removal of sharp edges to reduce potential for user harm
- Identification buttons available in Cold, Warm or Hot to suit application
- Anti-rotation pin incorporated to inhibit tampering
- 15mm extended spindle to account for additional wall thickness
- High quality Lead Free brass construction
- Chrome plated finish
- Watermark: AS/NZS 3718 WMKA 1583



## PRODUCT CODE

DET608-15EXT

Secure Ligature Resistant: Recess Adaptor -  
1/4 Turn Ceramic Disc - 15mm Extended



Due to ongoing Research and Development, specifications may change without notice.

Component specifications may change on some export models.

Refer to warranty statement for warranty details - [www.enware.com.au/warranty](http://www.enware.com.au/warranty).




Products are to be installed in accordance with the Plumbing Code of Australia and AS/NZS3500.

Reference should also be made to the Australasian Health Facility Guidelines (AHFG), ABCB and Local Government regulations when considering the choice of, and the installation of these products.

# Secure Ligature Resistant: Recess Adaptor - 1/4 Turn Ceramic Disc - 15mm Extended

## TECHNICAL DATA

|                              |              |
|------------------------------|--------------|
| Finish                       | Chrome       |
| Valve Type                   | Ceramic Disc |
| Maximum Working Temperature  | 85°C         |
| Minimum Recommended Pressure | 50kPa        |
| Maximum Recommended Pressure | 500kPa       |
| Maximum Static Pressure      | 800kPa       |

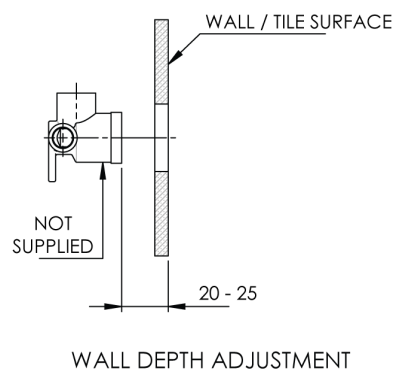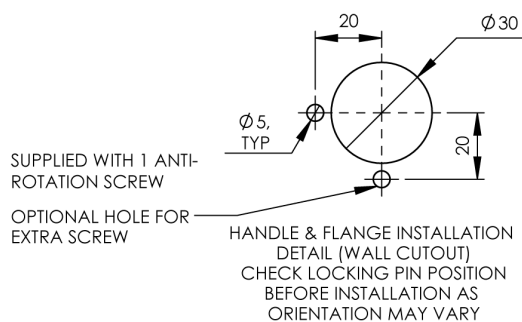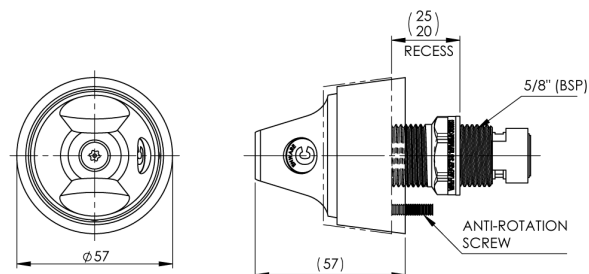

## OPTIONAL ACCESSORIES

|        |                     |
|--------|---------------------|
| DET005 | Trouble Dome - 5mm  |
| DET015 | Trouble Dome - 10mm |

# Secure Ligature Resistant: Recess Adaptor - 1/4 Turn Ceramic Disc - 15mm Extended

## SPARE PARTS

|           |  |
|-----------|--|
| DET383    | Spare Parts: Detention: Recess Adaptor - 15mm Extended           |
| MIS595RYB | Spare Parts: Indicator Button Kit - Hot / Cold / Warm - Stick On |