

# Detention Conical Shower Wall Mounted Shower Rose with Extended Tail

## DET661

Enware's water efficient Detention tapware series have been designed to provide a high level of security with the inclusion of vandal resistant features.


### KEY FEATURES

- Anti-ligature design
- Anti-rotation pin incorporated to inhibit tampering
- WELS: 3 Star (8 L/min)  
6 L/min available on request - specify when ordering
- Extended tail to suit wall thickness up to 260mm
- High quality dezincification resistant (DR) brass construction
- Chrome plated finish



### PRODUCT CODES

DET661	Detention Conical Shower Wall Mounted Shower Rose with Extended Tail
--------	--



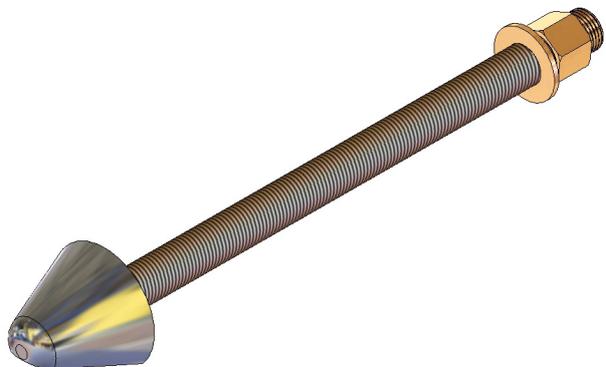


Version 1.0\_\_06Jul22


# Detention Conical Shower Wall Mounted Shower Rose with Extended Tail

## TECHNICAL INFORMATION

Recommended Pressure	200 - 500 kPa
Maximum Water Temperature	70°C
Flow Rate	8.0 L/min (3 Star WELS)
Inlet Connection	1/2" BSP male

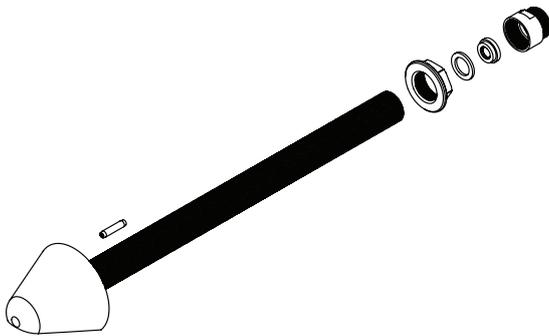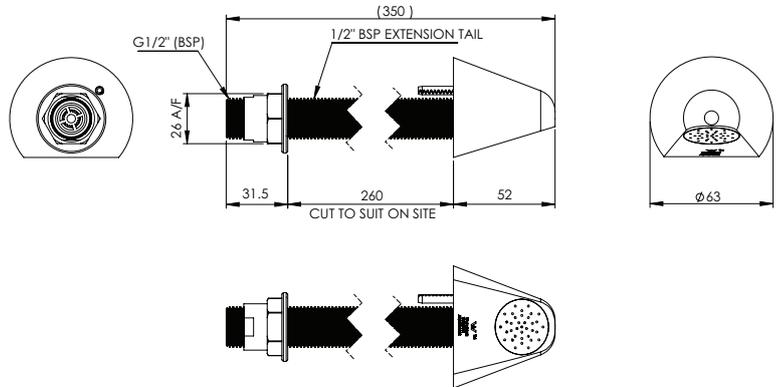

## Shower Spray Pattern

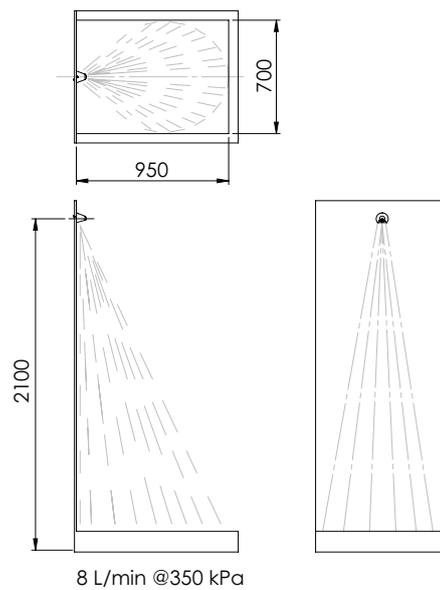

Enware products are to be installed in accordance with the Plumbing Code of Australia and AS/NZS3500. Reference should also be made to the Australasian Health facility Guidelines (AHFG), ABCB and Local Government regulations when considering the choice of, and the installation of these products.

Enware Australia advises:

1. Due to ongoing Research and Development, specifications may change without notice.
2. Component specifications may change on some export models.
3. Refer to warranty statement for warranty details - [www.enware.com.au/warranty](http://www.enware.com.au/warranty)

Version 1.0\_06Jul22