



EBTWS152 Soft Close Toilet Seat for Rimless Close-Coupled Toilet Suite

INSTALLATION

1. Remove metal toggles from hinge fixing bolts. Fit rubber grommets onto hinge fixing bolts.
2. Insert hinge fixing bolts with grommets into the holes on the toilet pan.
3. Use a Phillips head screw driver to tighten the bolts. As each bolt is tightened, the rubber grommet expands in the hole to secure the bolt in place.

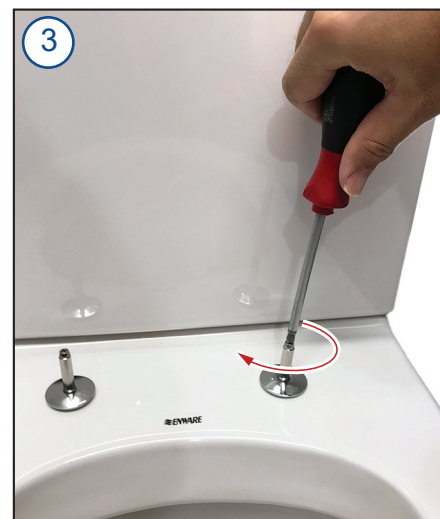

4. Apply anti-seize lubricant or protective grease inside connecting holes of the toilet seat hinge.
5. Fit the toilet seat onto hinge fixing bolts. Align the bolts to the holes on the seat, then simply push down until the seat clicks into place.

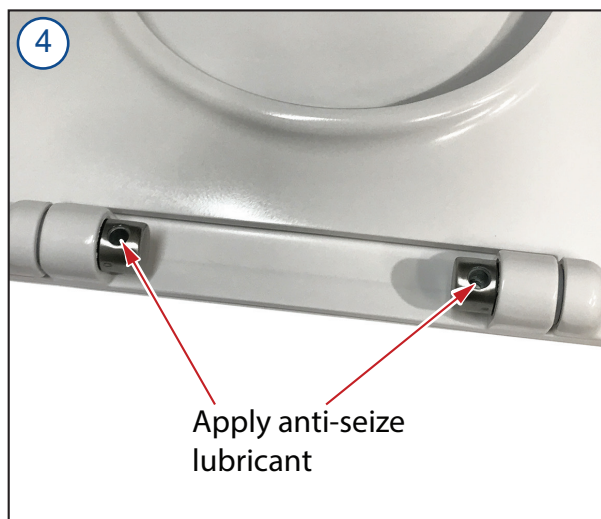

6. To remove the seat for maintenance, raise the seat and lid, then pull the seat straight up off the hinge bolts.

Rev. A.1

I00721_25 Sep 2026

www.enware.com.au

Page 1

ENWARE

A WATTS Brand

1300 369 273 | info@enware.com.au

© Enware Pty Ltd