


Hydrus 2.0 Cold DN40 L232mm Ultrasonic Water Meter Radio Sydney Water

Hydrus 2.0 Cold Ultrasonic Water Meter DN40 Radio
Sydney Water

KEY FEATURES

- NMI approved and WaterMarked with dynamic range up to R800
- Ultrasonic design minimises sedimentation
- Horizontal and vertical installation
- No magnetic influence
- U0 / D0, no need for calming sections
- Integrated radio communication based on Open Metering telegram (OMS Generation 3 or 4, Profile B)
- IP68 permanent immersion (suitable for outdoor installation)
- Higher performance than class 2 requirements
- Long-term stability under difficult conditions
- No measurement of air
- No over-run performance
- Display with error and alarm codes including leakage detection
- Battery lifetime up to 16 years
- Available in Cold Water DN 20, 25, 32, 40, 50, 80, 100, 150, 200
- Available in Hot Water DN 15, 20, 25, 32, 40

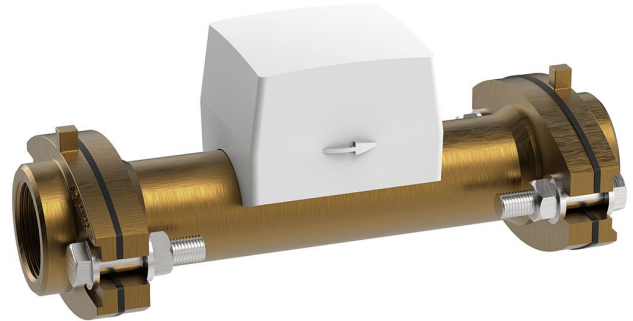

PRODUCT CODE

EHM5040X2FR-SW	Hydrus 2.0 Cold DN40 L232mm Ultrasonic Water Meter Radio Sydney Water
----------------	---





Due to ongoing Research and Development, specifications may change without notice.
Component specifications may change on some export models.
Refer to warranty statement for warranty details - www.enware.com.au/warranty.


Hydrus 2.0 Cold DN40 L232mm Ultrasonic Water Meter Radio Sydney Water

TECHNICAL DATA

Check Valve	None
Couplings	2 flanges included
Inlet Connection	Oval Flange 40mm
Outlet Connection	Oval Flange 40mm
Medium Temperature Range	Min 1°C Max 50°C
Ambient Operating Temperature	Min 1°C Max 70°C
Ambient Storage Temperature	Min -20°C Max 50°C
Nominal Pressure	1600 kPa
Power Supply	3.6VDC
Battery Lifetime	Up to 16 years
Interfaces	WM-BUS OMS Radio (R3, R4)
Frequency Band	434MHz
Sending Interval	15s
Approval	NMI R49, AS3565.1, AS3565.3
Protection Class	IP 68
Accuracy Class	2
Display Indication	LCD, 9-digit, additional symbols/display counter/unit
Values Displayed	Current Total Volume, Current Flow Rate, Remaining Battery Life, Error and Alarms, Software Version, Display Test
Maximum Continuous Flow Rate Q3	16000L/hr
Dynamic Range Horizontal	800 (Q1/Q3)
Dynamic Range Vertical	400 (Q1/Q3)
Flow Rate Q1	20L/hr
Flow Rate Q2	32L/hr
Flow Rate Q4	20000L/hr

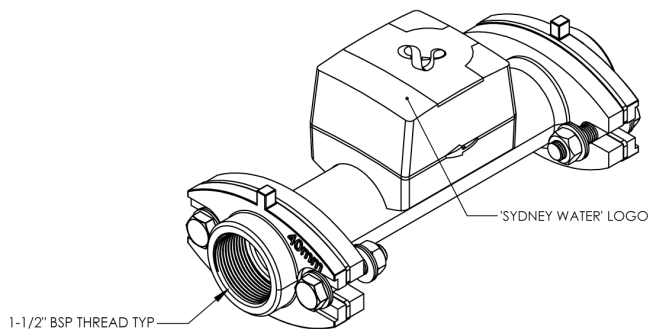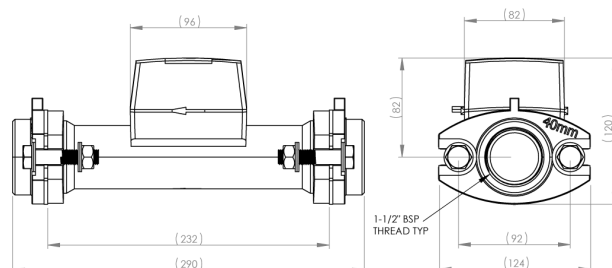

Pressure Loss Graph

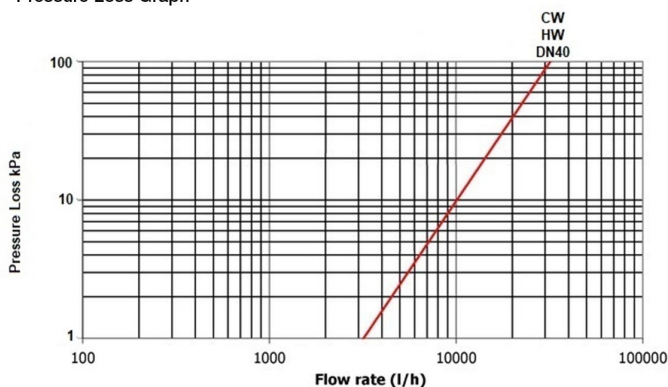

Typical Error Graph

