

# Single Button Control Kit - Front Access for In-Wall Application - Adjustable Time

The water efficient Detention tapware series have been designed to provide a high level of security with the inclusion of vandal resistant features.

## KEY FEATURES

- 2mm 304 Grade Stainless steel face plate, in wall mounting bracket and secure screws
- Touch-activated Piezo button with 1/2" Stainless Steel solenoid valve
- 24V DC power pack and 4.5m cable requires 240V GPO
- Factory set run time, adjustable on site
- Factory set run time - 4 minutes with early stop enabled and 30 seconds time out
- Adjustable from 3 seconds up to 10 minutes run time, with lockout and touch off function
- Ideal for Detention, public areas, council and camping facilities.
- For Shower or Basin controls
- Suitable for Cold or Pre-mixed (warm water)
- IP68 Rated Piezo button



## PRODUCT CODES

EMD811SS	Single Button Control Kit - Front Access for In-Wall Application - Adjustable Time
----------	--



Products are to be installed in accordance with the Plumbing Code of Australia and AS/NZS3500. Reference should also be made to the Australasian Health Facility Guidelines (AHFG), ABCB and Local Government regulations when considering the choice of, and the installation of these products.

This product is compliant with the Lead Free requirements of NCC Volume Three.

Due to ongoing Research and Development, specifications may change without notice. Component specifications may change on some export models.


Refer to warranty statement for warranty details - [www.enware.com.au/warranty](http://www.enware.com.au/warranty).

# Single Button Control Kit - Front Access for In-Wall Application - Adjustable Time

## TECHNICAL DATA

Finish	Brushed
Facia Plate Material Grade	304SS
Inlet Connection	1/2" BSP (15mm)
Recommended Pressure	50kPa - 500kPa
Maximum Static Pressure	1000kPa
Maximum Inlet Temperature	70°C
Facia Plate Material Grade	304SS
Finish	Brushed
Power Supply	24V DC 1.25A
IP Rating	IP68

\* Timing is adjustable from 3 Seconds to 600 seconds, and has the ability have lockout periods added, and be touched "off" before the programmed time period is expired. Programming requires no special tools, and can be updated at any time.

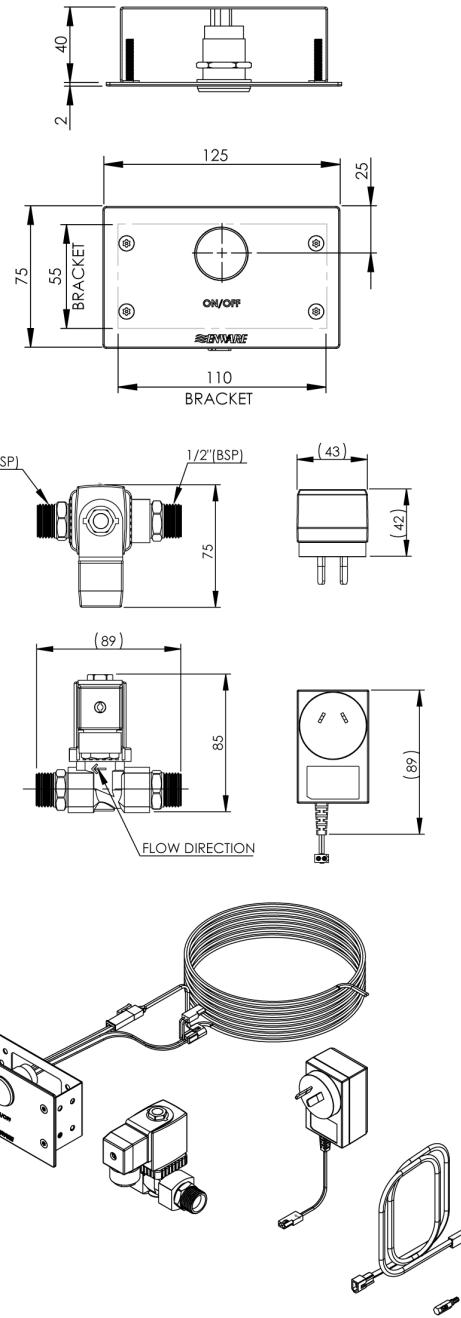

## OPTIONAL ACCESSORIES

CNSHRS-FF	Custodian: Shower Rose - On Wall Mount
EMDS801	EMD Touch-Activated Control Kits - 2m Extension Lead

# Single Button Control Kit - Front Access for In-Wall Application - Adjustable Time

## SPARE PARTS

EMDS801-4.5	EMD 4.5m Extension Lead for AC/DC Powerpack
EMDS802	Transformer 24VDC 1.25A 4.6m Lead
EMS811	Touch Button - Electronic Programmable Button
EMS816	1/2" SOLENOID VALVE DC S/S 24VDC
WMS8302	1/2" DC Solenoid Seal Kit