

Purus Hands Free Sensor Tap - Single Temp. 6V Battery - Matte Black PVD

High in quality and easy to use, the Enware Purus combines advanced electronic auto-focus technology with sleek yet robust design. Featuring a smooth and durable Matte Black PVD finish, providing an attractive design choice for all commercial Hands-Free washroom applications.



KEY FEATURES

- Smooth and durable Matte Black PVD finish fits perfectly with modern design colour palettes
- Auto-focus infrared sensing technology with triangulation for a more consistent, reliable operation
- Improved user friendliness with intelligent activation and after-flow technology
- Integral isolation valve to speed up on-going servicing and maintenance
- Electronics have IP67 rated protection against water and humidity ingress
- High reach spout to aid handwashing
- 12V Mains supply or 6V battery operated models
- Robust basin fixing -ideal for high traffic or vandal prone applications
- Lead free brass
- Supplied with WELS 6 Star (4.5lpm) water efficiency rating as standard
- Sensor can be programmed on site for various functions: intelligent after flow of 1, 2, or 8 sec, periodic flush every 24hr or 72hr, and reduced sensitivity mode (via App.)

PRODUCT CODE

ENM8250MB Purus Hands Free Sensor Tap - Single Temp. 6V Battery - Matte Black PVD



Products are to be installed in accordance with the Plumbing Code of Australia and AS/NZS3500. Reference should also be made to the Australasian Health Facility Guidelines (AHFG), ABCB and Local Government regulations when considering the choice of, and the installation of these products.

This product is compliant with the Lead Free requirements of NCC Volume Three.



Due to ongoing Research and Development, specifications may change without notice. Component specifications may change on some export models.

Refer to warranty statement for warranty details - www.enware.com.au/warranty.

Purus Hands Free Sensor Tap - Single Temp. 6V Battery - Matte Black PVD

TECHNICAL DATA


Inlet Connection	1/2" BSP PEX Connector
Working Pressure Range	100 - 500 kPa
Maximum Operating Temperature	70°C
Standard WELS Flow Rate	4.5 L/min
Sensor Range	Optimally preset using Auto-Focus technology
Maximum Flow Time	2 minutes per activation (adjustable)
Power - Battery	6V Lithium 2CR5 battery Battery life guide: 4 ± 1 years
IP Rating	IP 67

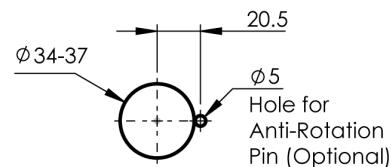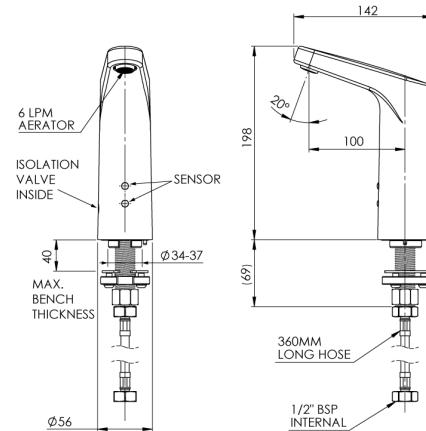

Installation Detail
(Benchtop Cut Out)
Please check anti-rotation pin
position before installation as
orientation may vary.

(Not to Scale)

Water Flow Projection

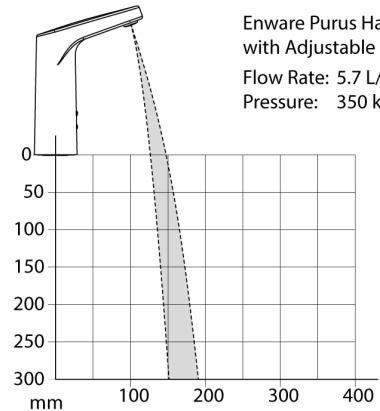

Enware Purus Hands Free Sensor Tap
with Adjustable Angle Aerator
Flow Rate: 5.7 L/min Laminar
Pressure: 350 kPa