

# Spout Swivel Outlet Aerated - 300mm - 125mm Height

Spout Swivel Outlet Aerated - 300mm reach x 125mm height to outlet



## PRODUCT CODE

FS182

Spout Swivel Outlet Aerated - 300mm - 125mm Height



Products are to be installed in accordance with the Plumbing Code of Australia and AS/NZS3500. Reference should also be made to the Australasian Health Facility Guidelines (AHFG), ABCB and Local Government regulations when considering the choice of, and the installation of these products.


This product is compliant with the Lead Free requirements of NCC Volume Three.

Due to ongoing Research and Development, specifications may change without notice. Component specifications may change on some export models.

Refer to warranty statement for warranty details - [www.enware.com.au/warranty](http://www.enware.com.au/warranty).

## TECHNICAL DATA

|                             |           |
|-----------------------------|-----------|
| WELS Category               | Tapware   |
| Standard WELS               | 3 Stars   |
| Standard WELS Flow Rate     | 8.5 L/min |
| Maximum Working Temperature | 70°C      |

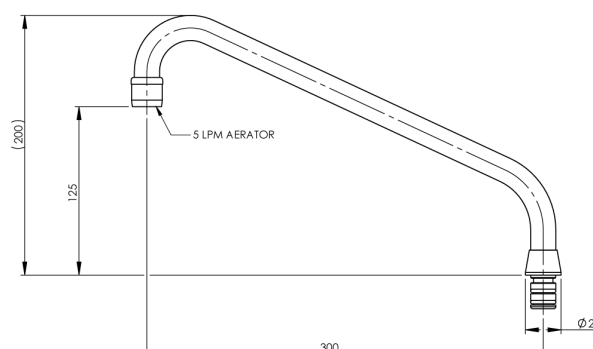

## SPARE PARTS

|       |                                                |
|-------|------------------------------------------------|
| SP301 | Aerator M22 x 1 Female 8 Lpm - (No.1) Standard |
|-------|------------------------------------------------|

Version 30 January 2026

1300 369 273 | [info@enware.com.au](mailto:info@enware.com.au) | [enware.com.au](http://enware.com.au)

**ENWARE**  
A WATTS Brand