

Swivel Spout 350mm - Type M

Swivel Spout with Reach 350mm - Type M



PRODUCT CODE

FS708

Swivel Spout 350mm - Type M



Products are to be installed in accordance with the Plumbing Code of Australia and AS/NZS3500. Reference should also be made to the Australasian Health Facility Guidelines (AHFG), ABCB and Local Government regulations when considering the choice of, and the installation of these products.


This product is compliant with the Lead Free requirements of NCC Volume Three.

Due to ongoing Research and Development, specifications may change without notice. Component specifications may change on some export models.

Refer to warranty statement for warranty details - www.enware.com.au/warranty.

TECHNICAL DATA

WELS Category	Tapware
Standard WELS	3 Stars
Standard WELS Flow Rate	8.5 L/min
Maximum Working Temperature	70°C

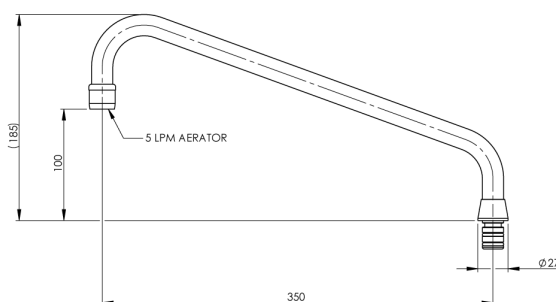

SPARE PARTS

SP301	Aerator M22 x 1 Female 8 Lpm - (No.1) Standard
-------	--

Version 30 January 2026

1300 369 273 | info@enware.com.au | enware.com.au

ENWARE
A WATTS Brand