

Leva Sequential Basin Mixer - 150mm Lever

The LEVA Sequential Basin Mixer is a new concept in Single Lever Type Mixers, designed specifically for use in Health and Aged Care premises, making an attractive and durable addition to any commercial bathroom. The 150mm lever operates a sequential ceramic cartridge that does not require a "lift" motion, and turns progressively from off, to cold, to mixed with a subtle click indicator at each point to assist the user. This feature

ensures the mixer is easy to use and control as well as reducing hot water consumption and potentially reducing the risk of legionella. The higher profile of the mixer and the longer spout provide easier access for effective handwashing. The spout can be removed for disinfection and the extended length ensures that the water stream does not flow directly into the basin waste, reducing the risk of airborne bacteria. Matches perfectly with the Aquablend Health TMV with Four Way Mixer.



PRODUCT CODE

LEV150306SQ

Leva Sequential Basin Mixer - 150mm Lever

KEY FEATURES

- Sequential Ceramic Disc Mixing Cartridge ensures ultimate control with cold start up and stop
- "CLICK" at Off, Cold and Mixed positions
- Removable spout allows disinfection
- Neoperl Soft-Pex inlet pipes provide long term reliability
- Colour indicators for Hot/ Warm, Cold and Off
- Attractive, solid brass chrome body and 150mm Leva Handle ensures ease of use and cleaning
- 150mm Lever Handle for AS1428/ ADA and Elbow operation applications
- Laminar flow aerator reducing the risk of airborne bacteria
- 80mm Lever Handle option available



Products are to be installed in accordance with the Plumbing Code of Australia and AS/NZS3500. Reference should also be made to the Australasian Health Facility Guidelines (AHFG), ABCB and Local Government regulations when considering the choice of, and the installation of these products.


This product is compliant with the Lead Free requirements of NCC Volume Three.

Due to ongoing Research and Development, specifications may change without notice. Component specifications may change on some export models.

Refer to warranty statement for warranty details - www.enware.com.au/warranty.

TECHNICAL DATA

Inlet Connection	1/2" BSP (15mm)
Maximum Working Temperature	85°C
Recommended Pressure	50kPa – 500kPa
Maximum Static Pressure	800kPa
Flow Rate	5 L/min
Valve Type	Ceramic Disc
Finish	Chrome

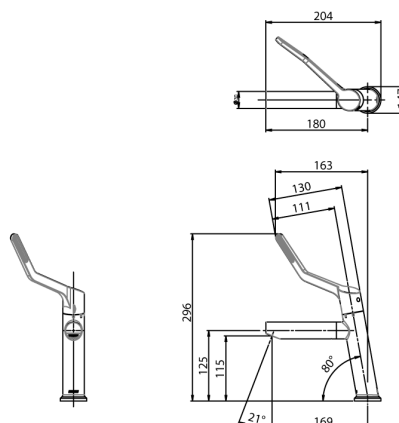

Version 22 December 2025

1300 369 273 | info@enware.com.au | enware.com.au

ENWARE
A WATTS Brand