


Leva Type 56 150mm Wall Mounted Mixing Set with Low Level Fixed Spout

The Leva range combines outstanding quality with functional, beautiful design. Ideal for Hospital and Aged Care applications, providing the benefits of easier reach and control. The 150mm lever allows hands-free elbow operation. The low-level spout reduces stagnant water held in the tap set, reducing the opportunity for bacterial growth.

Tap body and handles are designed to reduce bacterial capture points, and make cleaning easier.

This product is suitable to be used in a Type A or Type B clinical hand wash application. Surgeon tapware is suitable as a surgeon set or surgeon mixer.

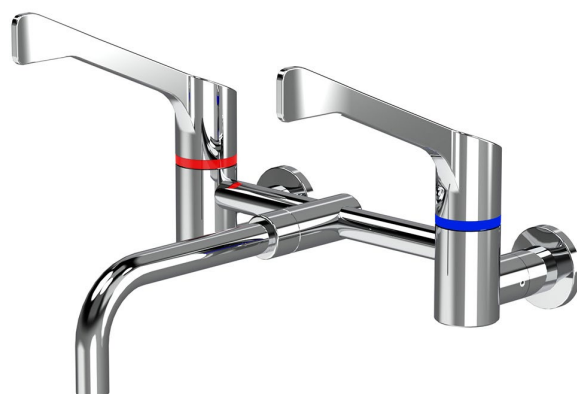

KEY FEATURES

- 1/4 Turn Ceramic disc
- Ergonomic sleek design 150mm lever handles
- Robust construction for superior performance
- Unique handle fixing is easy to fit, secure and durable
- Concealed pressure compensating flow controlled aerator for a clean look and water efficiency
- Clear identification on all lever handles with blue, yellow or red coloured indicator collars (3 colour indicator collars included)
- Low level fixed spout with laminar flow - suited to healthcare application
- 5 Star (5Lpm) laminar flow aerators supplied standard
- Lead free

PRODUCT CODE

LEV150420

Leva Type 56 150mm Wall Mounted Mixing Set with Low Level Fixed Spout



Products are to be installed in accordance with the Plumbing Code of Australia and AS/NZS3500. Reference should also be made to the Australasian Health Facility Guidelines (AHFG), ABCB and Local Government regulations when considering the choice of, and the installation of these products.

This product is compliant with the Lead Free requirements of NCC Volume Three.

Due to ongoing Research and Development, specifications may change without notice. Component specifications may change on some export models.

Refer to warranty statement for warranty details - www.enware.com.au/warranty.

TECHNICAL DATA

Inlet Connection	1/2" BSP (15mm) FI
Recommended Pressure	50kPa – 500kPa
Maximum Static Pressure	800kPa
Maximum Recommended Temperature	70°C
Maximum Ceramic Disc Working Temperature	85°C
Flow Rate	5 L/min
Valve Type	1/4 Turn Ceramic Disc
Finish	Chrome

