

Cache Wall Mounted Fixed Spout for Wall Sensor - 250mm

Enware's Cache range of outlets feature cleaner lines with an internally housed aerator. Lead Free Brass, Enware Cache outlets deliver proven durability with style.

KEY FEATURES

- Fixed spout
- 1/2" BSP MI tail and backnut supplied loose
- 3.8 L/min and 6 L/min laminar flow aerators supplied standard
- No flange



PRODUCT CODE

SPC250-SP

Cache Wall Mounted Fixed Spout for Wall Sensor - 250mm



* Watermark registered as part of ENM5071A-250

Due to ongoing Research and Development, specifications may change without notice. Component specifications may change on some export models.

Refer to warranty statement for warranty details - www.enware.com.au/warranty.



This product is compliant with the Lead Free requirements of NCC Volume Three.

Products are to be installed in accordance with the Plumbing Code of Australia and AS/NZS3500. Reference should also be made to the Australasian Health Facility Guidelines (AHFG), ABCB and Local Government regulations when considering the choice of, and the installation of these products.

Cache Wall Mounted Fixed Spout for Wall Sensor - 250mm

TECHNICAL DATA

Maximum Working Temperature	70°C
Minimum Recommended Pressure	50kPa
Maximum Recommended Pressure	500kPa
Flow Rate	6 L/min, 3.8 L/min
Inlet Connection	1/2" BSP

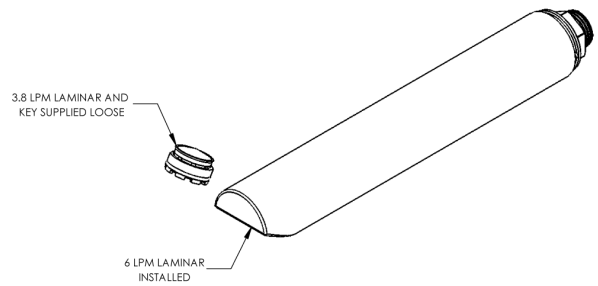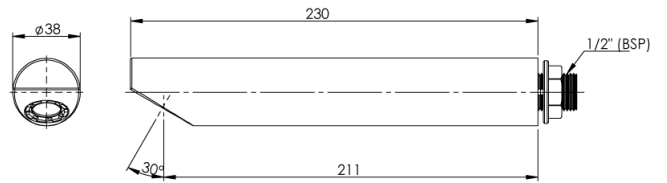

Water Flow Projection

Water Pressure: 350kPa
Flow Rate: 5 L/min

