

Delabie TempoSoft Time-Flow Wall Tap - 7 Seconds

Time flow, wall mounted basin tap with easy to use soft-push operation. Automatic shut-off for improved hygiene and reduced water wastage. Purpose designed optional extension piece available for when basin, sink or trough is set further away from the wall than is ideal. Designed to be vandal resistant and integrate cleanly with the standard TempoSoft wall tap. Ideal for public washrooms, schools, childcare and applications where easy activation is beneficial.



KEY FEATURES

- Soft push activation
- Approximately 7 seconds* flow time
- Automatic shut-off without manual contact
- Hygienic, anti-scale flow straightener outlet
- Vandal resistant design
- Chrome-plated brass body
- Supplied with blue, yellow and red indicators
- 1/2" BSP female inlet connection

* Flow times are indicative only and may vary depending on water supply pressure and flow conditions

PRODUCT CODES

TFC741510 7 Seconds



Products are to be installed in accordance with the Plumbing Code of Australia and AS/NZS3500. Reference should also be made to the Australasian Health Facility Guidelines (AHFG), ABCB and Local Government regulations when considering the choice of, and the installation of these products.

This product is compliant with the Lead Free requirements of NCC Volume Three.

Due to ongoing Research and Development, specifications may change without notice. Component specifications may change on some export models.


Refer to warranty statement for warranty details - www.enware.com.au/warranty.

TECHNICAL DATA

| | |
|---------------------------------|--------------------|
| Inlet Connection | 1/2" BSP (15mm) FI |
| Recommended Pressure | 250kPa – 300kPa |
| Working Pressure Range | 100kPa – 500kPa |
| Maximum Testing Pressure | 1000 kPa |
| Maximum Recommended Temperature | 50°C |
| Maximum Working Temperature | 70°C |
| Valve Type | Time Flow |
| Flow Time | 7 Seconds* |
| Flow Rate | 5 L/min |
| Valve Type | Time Flow |
| Operating Force | 18N @300kPa |
| Finish | Chrome |

* Enware-Delabie time flow tapware uses mechanical technology and flow times may vary under different flow and pressure conditions

Flow can be adjusted by repositioning the marker ring on the cartridge

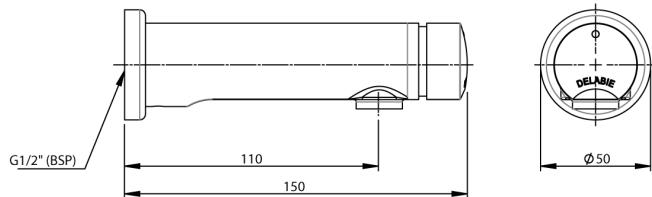


Delabie TempoSoft Time-Flow Wall Tap - 7 Seconds

OPTIONAL ACCESSORIES

TFC74165EXT 65mm Extension suits TFC741510



Shown with TFC74165EXT extension (optional)

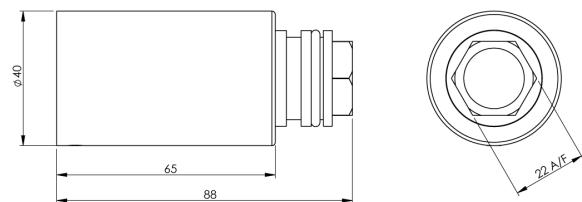

Delabie TempoSoft Time-Flow Wall Tap - 7 Seconds

SPARE PARTS

