## Wellbeing Leva 150mm Wall Mounted Mixing Set with Straight Spout & Isolation Valves

WLC150WS

The Leva range combines outstanding quality with functional, beautiful design. Ideal for Hospital and Aged Care applications, providing the benefits of easier reach, control, and enhanced hygiene with fewer gaps that can trap dirt and bacteria. The 150mm lever allows hands-free elbow operation suitable for clinical handwash and scrub sink environments where hygiene is critical.

#### **KEY FEATURES**

- Quarter-turn, contra-rotating 150mm lever handles
- Ceramic Disc
- WELS: 5 Star (5 L/min) laminar flow aerator supplied standard. 6 Star (4 L/min) laminar flow aerator available on request - specify when ordering
- Ergonomic sleek design 150mm lever handle ensures ease of use either by wrist or elbow
- Clear identification on all lever handles with blue, yellow or red coloured indicator collars
- Removable spout allows disinfection
- · On-wall isolating ball valves
- · Attractive, solid brass chrome body
- Laminar flow aerator reducing the risk of airborne bacteria
- Robust construction for superior performance
- · Australian designed and manufactured



#### **PRODUCT CODES**


WLC150WS Wellbeing Leva 150mm Wall Mounted Mixing Set with Straight Spout & Isolation Valves


Version 1.0\_\_02Sep22


# Wellbeing Leva 150mm Wall Mounted Mixing Set with Straight Spout & Isolation Valves

### **TECHNICAL INFORMATION**

Working Pressure Range	Min 50 kPa Max 500 kPa
Maximum Static Pressure	800 kPa
Maximum Working Temperature	85°C (Ceramic disc)
Inlet Connection	1/2" BSP Female
Flow Rate	5 L/min (WELS 5 Star) 4 L/min (WELS 6 Star)

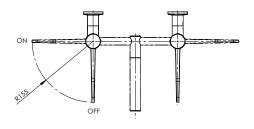

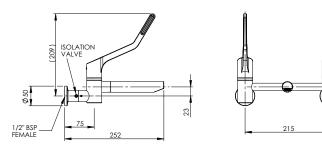

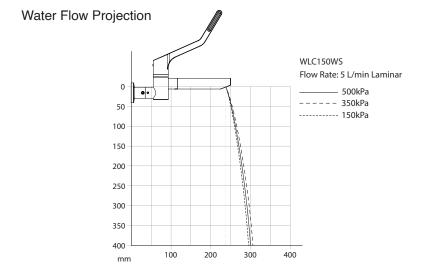







Enware products are to be installed in accordance with the Plumbing Code of Australia and AS/NZS3500. Reference should also be made to the Australasian Health facility Guidelines (AHFG), ABCB and Local Government regulations when considering the choice of, and the installation of these products. Enware Australia advises:

1. Due to ongoing Research and Development, specifications may change without notice. 2. Component specifications may change on some export models. 3. Refer to warranty statement for warranty details - www.enware.com.au/warranty

Version 1.0\_\_02Sep22

