

Wellbeing Leva 150mm Type 56 Wall Mounted Exposed Mixing Set with Straight Spout & Isolation Valves

The Wellbeing Leva range combines outstanding quality with functional, beautiful design. Ideal for Hospital and Aged Care applications, providing the benefits of easier reach, control, and enhanced hygiene with fewer gaps that can trap dirt and bacteria. The 150mm lever allows hands-free elbow operation suitable for clinical handwash and scrub sink environments where hygiene is critical.

KEY FEATURES

- Quarter-turn, contra-rotating 150mm lever handles
- Ceramic Disc
- WELS 5 Star (5 L/min) laminar flow aerator
- Ergonomic sleek design 150mm lever handle ensures ease of use either by wrist or elbow
- Clear identification on all lever handles with blue, yellow or red coloured indicator collars
- Removable low level spout reduces stagnation and allows disinfection
- On-wall isolating ball valves
- Attractive chrome body
- Lead Free brass
- Laminar flow aerator reducing the risk of airborne bacteria
- Robust construction for superior performance
- Designed and Engineered in Australia



PRODUCT CODE

WLC150WS

Wellbeing Leva 150mm Type 56 Wall
Mounted Exposed Mixing Set with Straight
Spout & Isolation Valves



Products are to be installed in accordance with the Plumbing Code of Australia and AS/NZS3500. Reference should also be made to the Australasian Health Facility Guidelines (AHFG), ABCB and Local Government regulations when considering the choice of, and the installation of these products.

This product is compliant with the Lead Free requirements of NCC Volume Three.



Due to ongoing Research and Development, specifications may change without notice. Component specifications may change on some export models.

Refer to warranty statement for warranty details - www.enware.com.au/warranty.

Wellbeing Leva 150mm Type 56 Wall Mounted Exposed Mixing Set with Straight Spout & Isolation Valves

TECHNICAL DATA

Inlet Connection	1/2" BSP (15mm) FI
Recommended Pressure	50kPa – 500kPa
Maximum Static Pressure	800kPa
Maximum Recommended Temperature	70°C
Maximum Ceramic Disc Working Temperature	85°C
Flow Rate	5L/min
Valve Type	1/4 Turn Ceramic Disc
Finish	Chrome

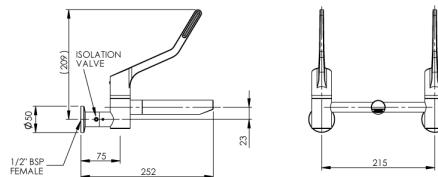

Water Flow Projection

