

# Wellbeing Leva 150mm Lever Pillar Tap - Jumper Valve 1/4 Turn

The Leva range combines outstanding quality with functional, beautiful design. Ideal for Hospital and Aged Care applications, providing the benefits of easier reach, control, and enhanced hygiene with fewer gaps that can trap dirt and bacteria. The 150mm lever allows hands-free elbow operation suitable for clinical handwash and scrub sink environments where hygiene is critical.

## KEY FEATURES

- Quarter-turn, contra-rotating 150mm lever handle
- Jumper Valve
- Fixed spout
- Clear identification on lever handle with blue, yellow or red coloured indicator collar
- Ergonomic sleek design 150mm lever handle ensures ease of use either by wrist or elbow
- Attractive chrome body
- Laminar flow aerator reducing the risk of airborne bacteria
- Robust vandal resistant construction for superior performance
- Lead Free brass
- Designed and Engineered in Australia



## PRODUCT CODES

WLJV150PLTC	Left-Turn / Anti-Clockwise to Close
WLJV150PRTC	Right-Turn / Clockwise to Close



Lead Free  
AS3718  
WMKA1583



WATER RATING  
www.waterrating.gov.au  
5.5 litres per minute  
In accordance with AS/NZS 4400



WATER RATING  
www.waterrating.gov.au  
4 litres per minute  
In accordance with AS/NZS 4400

Products are to be installed in accordance with the Plumbing Code of Australia and AS/NZS3500. Reference should also be made to the Australasian Health Facility Guidelines (AHFG), ABCB and Local Government regulations when considering the choice of, and the installation of these products.

This product is compliant with the Lead Free requirements of NCC Volume Three.



Due to ongoing Research and Development, specifications may change without notice. Component specifications may change on some export models.

Refer to warranty statement for warranty details - [www.enware.com.au/warranty](http://www.enware.com.au/warranty).


# Wellbeing Leva 150mm Lever Pillar Tap - Jumper Valve 1/4 Turn

## TECHNICAL DATA

Inlet Connection	1/2" BSP (15mm)
Recommended Pressure	50kPa – 500kPa
Maximum Static Pressure	1200kPa
Maximum Recommended Temperature	70°C
Maximum Jumper Valve Working Temperature	95°C
Flow Rate	5 L/min
Valve Type	1/4 Turn Jumper Valve
Finish	Chrome

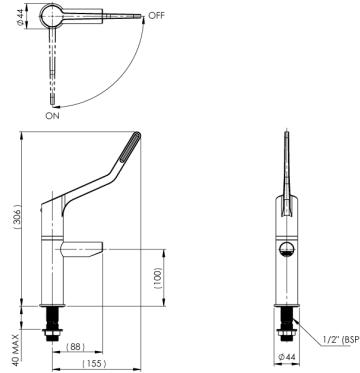

INSTALLATION DETAIL  
(BENCH TOP CUT OUT)

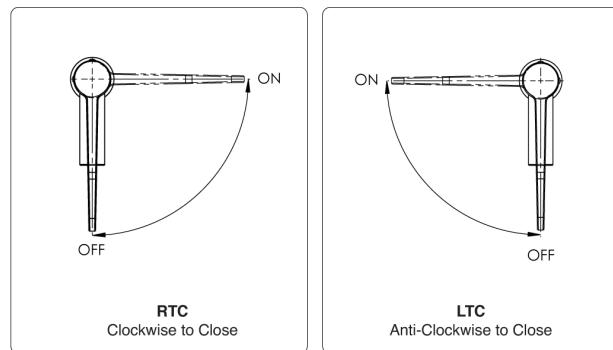

Water Flow Projection

