

Enware-Delabie Tempostop Shower Valve - Recessed

TFC749128

The Tempomix shower mixers when operated provides a 30 second automatic shut-off . With an easy push button activation.

Designed to comply with intensive use in public areas with a high resistance to vandalism.

FEATURES

- Easy push button activation
- Automatic shut-off delay 30 seconds*
- Coverplate is without exposed screws providing a high resistance to vandalism

* Times are indicative only and may vary depending on the water supply pressure and flow conditions

OPTIONS

Shower heads to suit available.

Enware-Delabie Round Vandal Resistant Shower Head **TFC709000**

Enware-Delabie Tonic Jet Vandal Resistant Shower Head **TFC712000**

School Pattern Shower Outlet **VP310**



Product Codes

TFC749128 Tempomix Shower Mixer - Recessed




Technical Information

Inlet Connection	15mm 1/2" BSP
Maximum Testing Pressure	1000 kPa
Maximum Working Pressure	500 kPa *
Recommended Pressure	250 - 300 kPa
Maximum Water Temperature	70°C^
Operating Force	22N @ 300 kPa

*Enware tapware must be installed in accordance with the provisions of AS/NZS3500 and any relevant local regulations. Installations not complying with AS/NZS3500 may void the product and performance warranty provisions. ^ For all sanitary fixtures used primarily for personal hygiene purposes are to deliver heated water not exceeding:
a) 45°C for early childhood centres, primary and secondary schools, nursing homes or similar
b) 50°C in all other buildings

NOTE: Enware Australia advises that due to ongoing Research and Development, specifications may change without notice and component specifications may change on some export models.

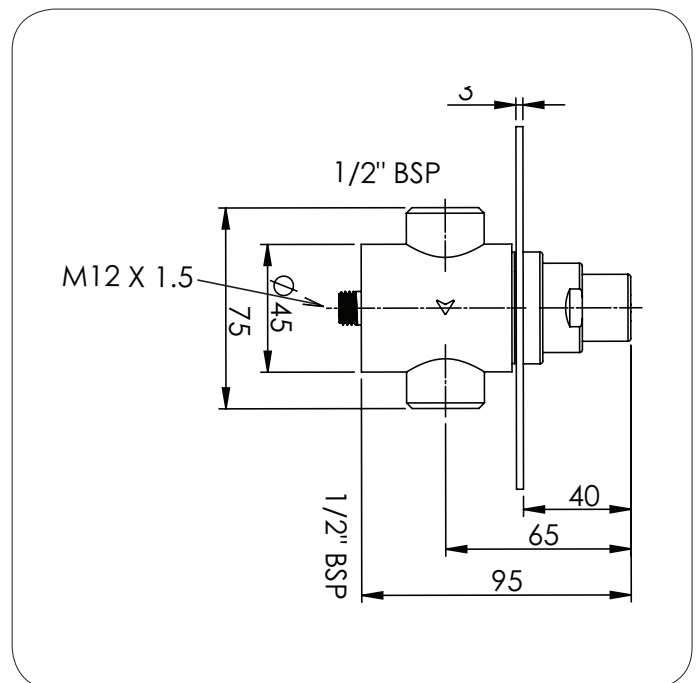

Version: Sep 17

Call **1300 369 273**
www.enware.com.au

Enware Australia Pty Limited
 9 Endeavour Rd Caringbah NSW 2229 Australia
 Ph: 02 8536 4000 Fax: 02 8556 4055

