Freestanding Water Chiller with Bubbler and Carafe Filler - White Powder Coat

Enware water chillers offer a constant supply of chilled mains water, an environmentally friendly alternative to buying bottled water and reducing the use of plastic packaging. Models to suit every application, including schools, universities, gymnasiums, municipal buildings, public areas and workplaces.



KEY FEATURES

- Flow rate of up to 18 litres/hour of chilled water
- 4 Litre storage tank
- Hygienic, polished stainless steel tops designed for rapid draining
- Adjustable levelling feet
- Stainless steel storage tank
- FDA approved internal pipework
- Environmentally friendly R134A refrigerant
- Side carry handles and removable front access panel for easy installation
- Includes internal waste trap
- IP33 Rated
- Lead Free waterways

PRODUCT CODE

DFSA120	Freestanding Water Chiller with Bubbler and Carafe Filler - White Powder Coat

WMTS-105
WMK26061

Due to ongoing Research and Development, specifications may change without notice. Component specifications may change on some export models.

Refer to warranty statement for warranty details - www.enware.com.au/warranty.

This product is compliant with the Lead Free requirements of NCC Volume Three.

Products are to be installed in accordance with the Plumbing Code of Australia and AS/NZS3500. Reference should also be made to the Australasian Health Facility Guidelines (AHFG), ABCB and Local Government regulations when considering the choice of, and the installation of these products.


1300 369 273 | info@enware.com.au | enware.com.au

ENWARE
A WATTS Brand

Freestanding Water Chiller with Bubbler and Carafe Filler - White Powder Coat

TECHNICAL DATA

Finish	White Powder Coating
Condensor	Wire Tube
Refrigerant	R134a, 250g
Tank Capacity	4L
Minimum Recommended Pressure	50kPa
Maximum Recommended Pressure	500kPa
Pressure Notes	Use of pressure reduction valve is recommended if inlet pressure may exceed 500 kPa
Chilled Water Production	18 L/hr
Inlet Connection	1/2" BSP male
Water Drain Connection	40mm DWV PVC
Power Connection	3 pin 10 A plug with 2m lead
Power Supply	AC
Compressor Size	362W
Power Supply	240V
Power Supply	50Hz
IP Rating of Alarm System	IP33
Height	940mm
Width	330mm
Length	320mm
Weight	28kg
Technical Notes	Power Supply: 230-240V / 50 Hz
	Climate Condition: SN.N (Suitable for use in ambient temperatures of 10°C to 32°C)

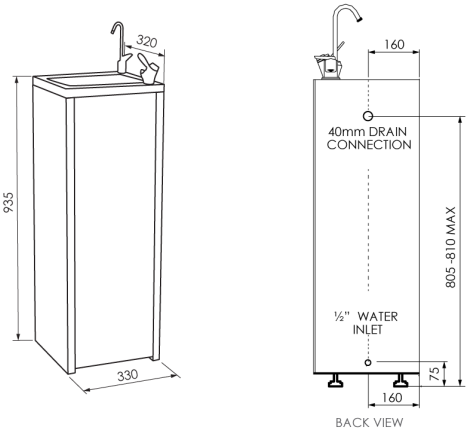

OPTIONAL ACCESSORIES

DFS002F	Spare Parts: Carbon Filter

SPARE PARTS

BUB292	Type 62 Bottle & Glass Filler - Hob Mounted - Complete
BUB294	Spare Parts: Type 61 Cartridge
BUB290	Hob Mounted Bubbler - Push Button
DFSAS202	Bottle Trap 40mm Adjustable - White - Plug and Waste
DFSAS200	Spare Parts: Thermostat For DFSA Chillers
DFSAS201	Spare Parts: Valve For Dfsa Chillers -PRV