

Emergency Stainless Steel Combination Shower with Hand/Foot Operated Eye/Face Wash

Enware's emergency safety showers assist in the rapid flushing of contaminants from the body with a deluge of flushing fluid and eye/face wash units help to flush contaminants and irritants from eyes and facial area. Stainless steel construction provides superior durability and reliability.

KEY FEATURES

- Independently tested for compliance to ANSI Z358.1 and AS4775
- Freestanding for stand-alone operation
- 316 stainless steel pipe work and stay-open ball valve
- 316 Stainless steel 200mm (8") shower head assembly
- 316 Stainless steel handle with high visibility yellow powder coating
- Hand push and foot activated eye/face wash with integral auto-open dust covers
- Eye/face wash features Vertech Technology where dedicated eyewash and independently angled face wash streams deliver optimum coverage
- Zero velocity apex point provides more comfort & control of eyes for effective cleansing
- Solid stainless, low angle foot pedal for easy activation of eye/face wash
- High visibility yellow powder coated push handle and foot pedal
- Self-draining design reduces Legionella risk, particularly in tepid water applications
- Balanced simultaneous operation



PRODUCT CODES

ECE270	Stainless Steel
ECE270GR	Green
ECE270WH	White
ECE270YE	Yellow




Installation of emergency showers, eye and eye/face wash equipment shall be in accordance with AS/NZS4775 or ANSI Standard Z358.1 - whichever is applicable to the installation. Due to ongoing Research and Development, specifications may change without notice. Component specifications may change on some export models. Refer to warranty statement for warranty details - www.enware.com.au/warranty.

Emergency Stainless Steel Combination Shower with Hand/Foot Operated Eye/Face Wash

TECHNICAL DATA

Inlet Connection	25mm (1"BSP)
Water Supply Line Size	Must be hydraulically sized to meet requirements.
Minimum Working Pressure	210kPa
	Caution when pressure exceeds 550 kPa
Minimum Shower Flow Rate	76L/min
Minimum Eye/Facewash Flow Rate	26L/min
Waste Water Outlet Connection	32mm (1-1/4"BSP)
Weight	12.7kg

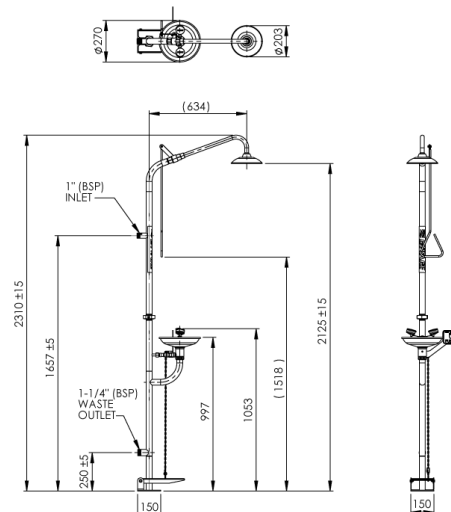

OPTIONAL ACCESSORIES

EST101	Eyewash Tester
EST100	Anti-Static Shower Tester

SPARE PARTS

ESPE012	Spare Parts: Eye-Face Wash Outlet with Dust Cover and Aerator (Each)
ESPE013	Spare Parts: Aerator Cache Honeycomb TJ M18.5 x 1
ESPE014	Spare Parts: ECE Aerator Key for Eye/Face Wash
ESPE811	Spare Parts: ECE 1/2"Filter 40 Mesh
ESPE812	Spare Parts: ECE O-Ring Replacement Set
ESPE815	Spare Parts: Eye/Face Wash Tree Assembly ECE
ESPE002RETRO	Retrofit ECE Eyewash Frame Only
ESPE004	Spare Parts: Emergency Eye Face Wash - ECE Insert Flow Control - Eye/Face Wash
ESPE814	Spare Parts: ECE Grub Screw M6 x 12mm Dog Point Suit Eye Wash Frame
ESP005	Spare Parts: Ball Valve for Eye/Face Wash - FF Half Inch Stainless Steel One Piece
ESPE010	Spare Parts: ECE Push Handle to Suit Eye/Face Wash Control
ESPE009	Spare Parts: ECE Pull Handle to Suit Shower Operation
ESPE005	Spare Parts: ECE Shower Arm and Rose
ESPE008	Spare Parts: ECE Bowl Only
ESPE001	Foot Op Conversion Kit For Eye Wash
ESS521	Emergency Shower and Eye Wash Inspection Tag Replacement
ESPE006	Spare Parts: ECE Frame Top Section Only with Ball Valve